


NOTES:

1. ASSEMBLE PER ANSI/IPC-A-610A, CLASS 2 STANDARDS.



4

MARK BOM ASSEMBLY NUMBER, BOM REVISION, VENDOR I.D. AND DATE CODE (DRAWING AND BOM REVISION WON'T ALWAYS MATCH). USE .10±.03 [2.5±0.8] HIGH PERMANENT CONTRASTING LETTERING ON LABEL

RS422	RS232				
TxD+	RTS	Pin4		Jaune	.RTS/TxD +
TxD-	TxD	Pin6		Rose	.TxD/TxD -
RxD+	RxD	Pin5		Gris	.RxD/RxD +
RxD-	CTS	Pin3		Vert	.CTS/RxD -
PPS	EVENT	Pin7		Bleu	.PPS/EVENT
GND	GND	Pin2		Marron	.GND
12V	12V	Pin1		Blanc	.+12V
		Case		Noir	.Shield (Case)



SOLDER CUP SIDE
J1

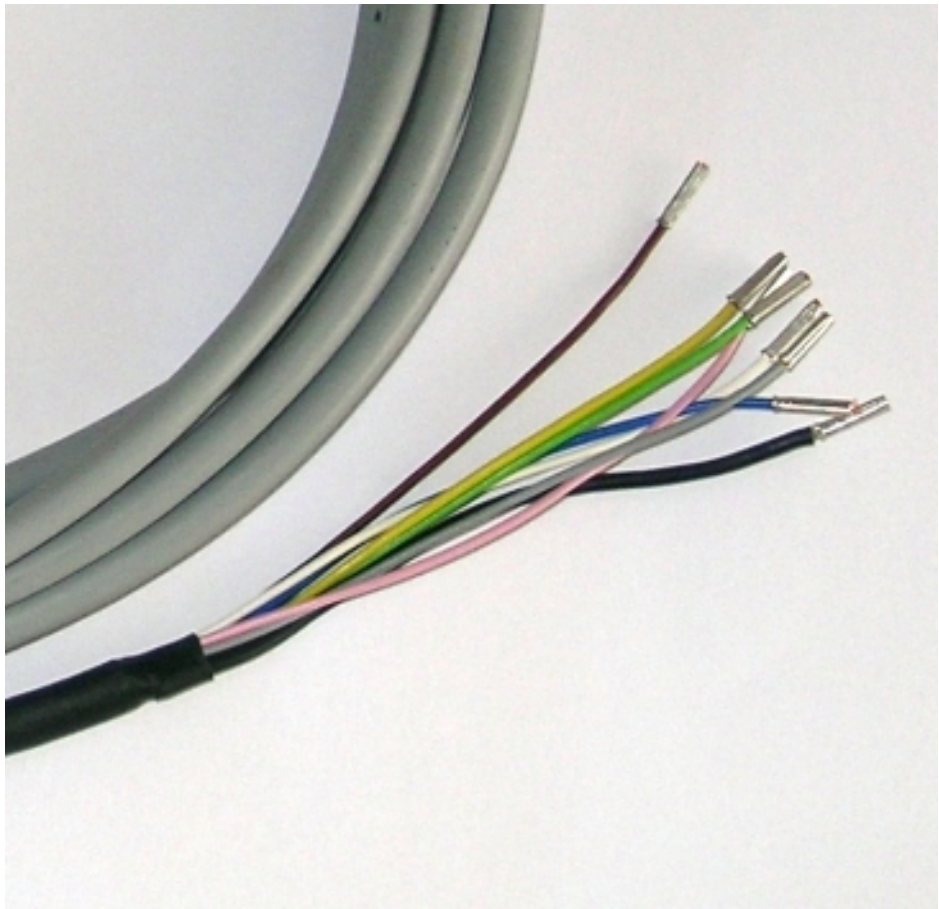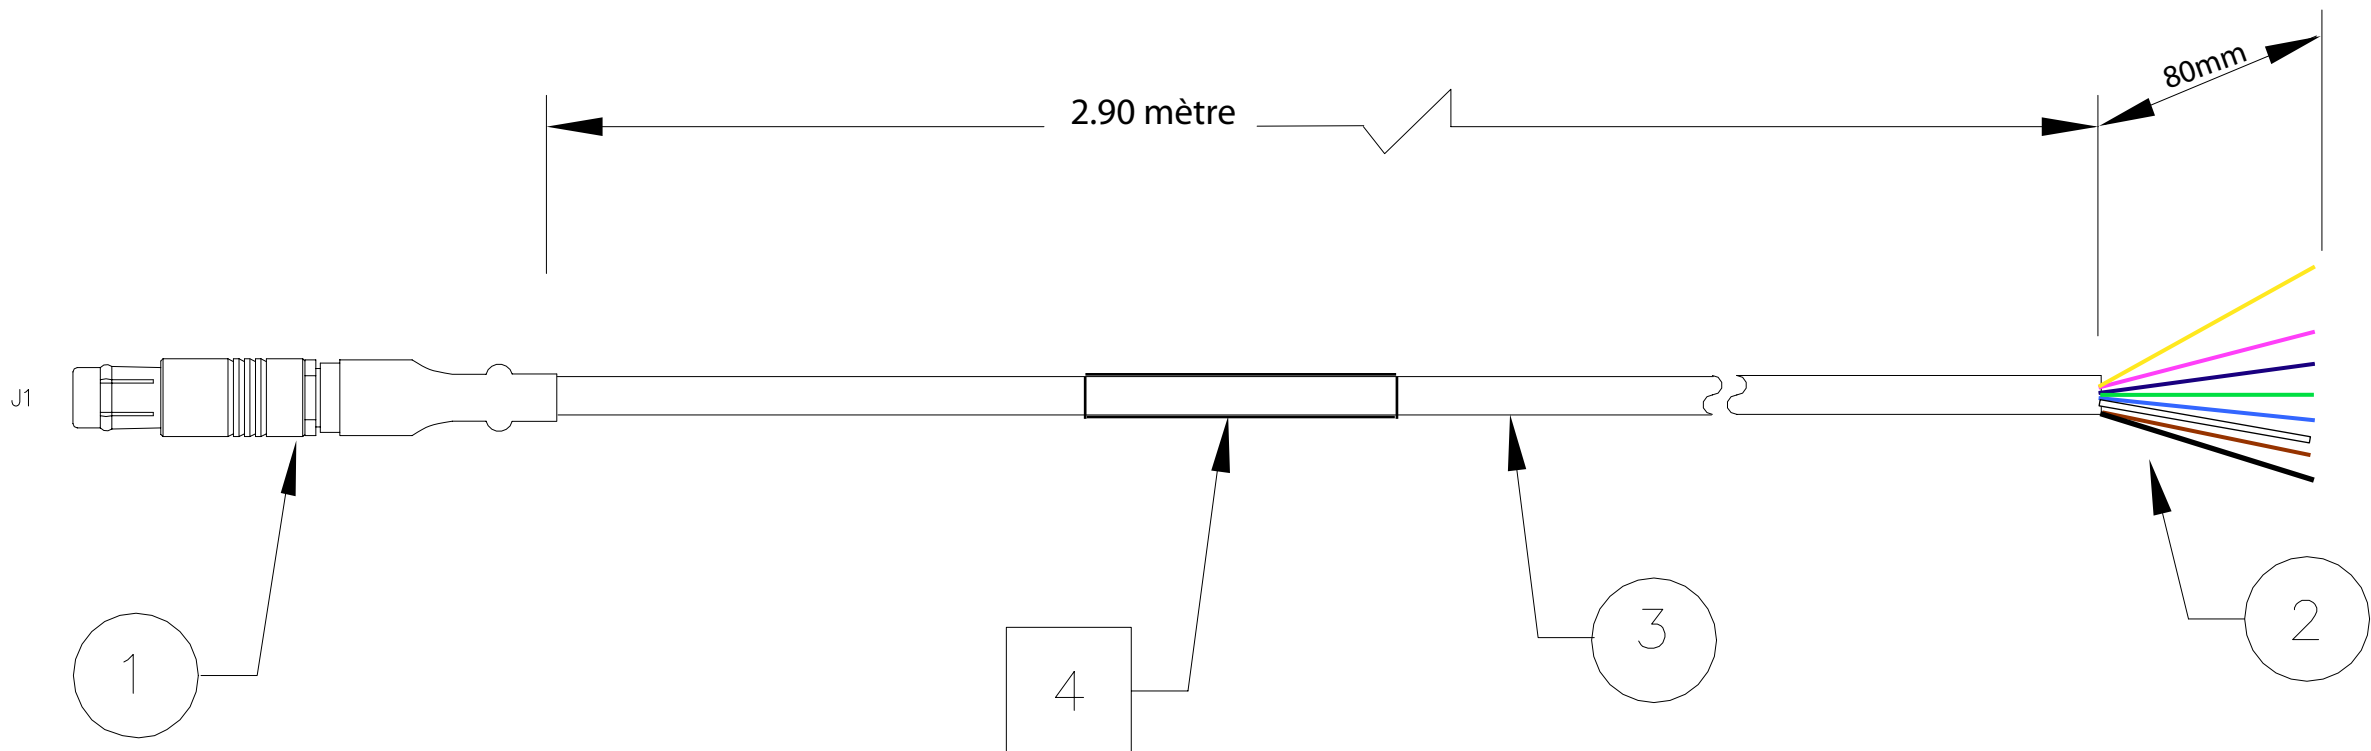

ITEM	DESCRIPTION	MANUFACTURER	QTY
1 J1	S102-A056-130 or 20F1CP07MCC045G	Fisher or Odu	1
2 J2	Embouts de câblage non isolés sur chaque fils		8
3	câble blindé R < 50m oHm 12V & GND (Pin 1 - 7)		

This drawing is the exclusive property of ASHTECH S.A.S. Reproduction and unauthorized use are forbidden. Ce document est la propriété inaliénable de ASHTECH S.A.S. Reproduction et diffusion sont interdites.			
		Material Matiere : -	Tolerance : -
CAD System System CAO		Treatment Traitement : -	Scale : 1.00 Echelle
Pro/Engineer		Finish Finition : -	File Fichier :
Drw : J. CHARNEAU	Date : August 27th 2009	Title Titre CABLE MULTI -FONCT FICHER 7CT L:2.9 M	
Chkd : -	Date : -		
Appd :	Date :		
Pages/Sheet 1/1	Format A	P/N A702450	Rev / Indice B