

NOTES: UNLESS OTHERWISE SPECIFIED

APPLY LOCTITE RED #271/ BLUE #242 AS PER MFG. INSTRUCTIONS.

USING PRIMER (14), PRIME SCREWS AND THREADED HOLES AS PER MFG. INSTRUCTIONS BEFORE APPLYING LOCTITE RED (15).

LIGHTLY APPLY LOCTITE RED (15) TO THREADS.


LIGHTLY APPLY LOCTITE BLUE (16) TO THREADS.

PLACE METALIZED LABEL (14) APPROXIMATELY WHERE SHOWN.

6 PACKAGE ACCORDING TO QUANTITY.

FRONT

BACK

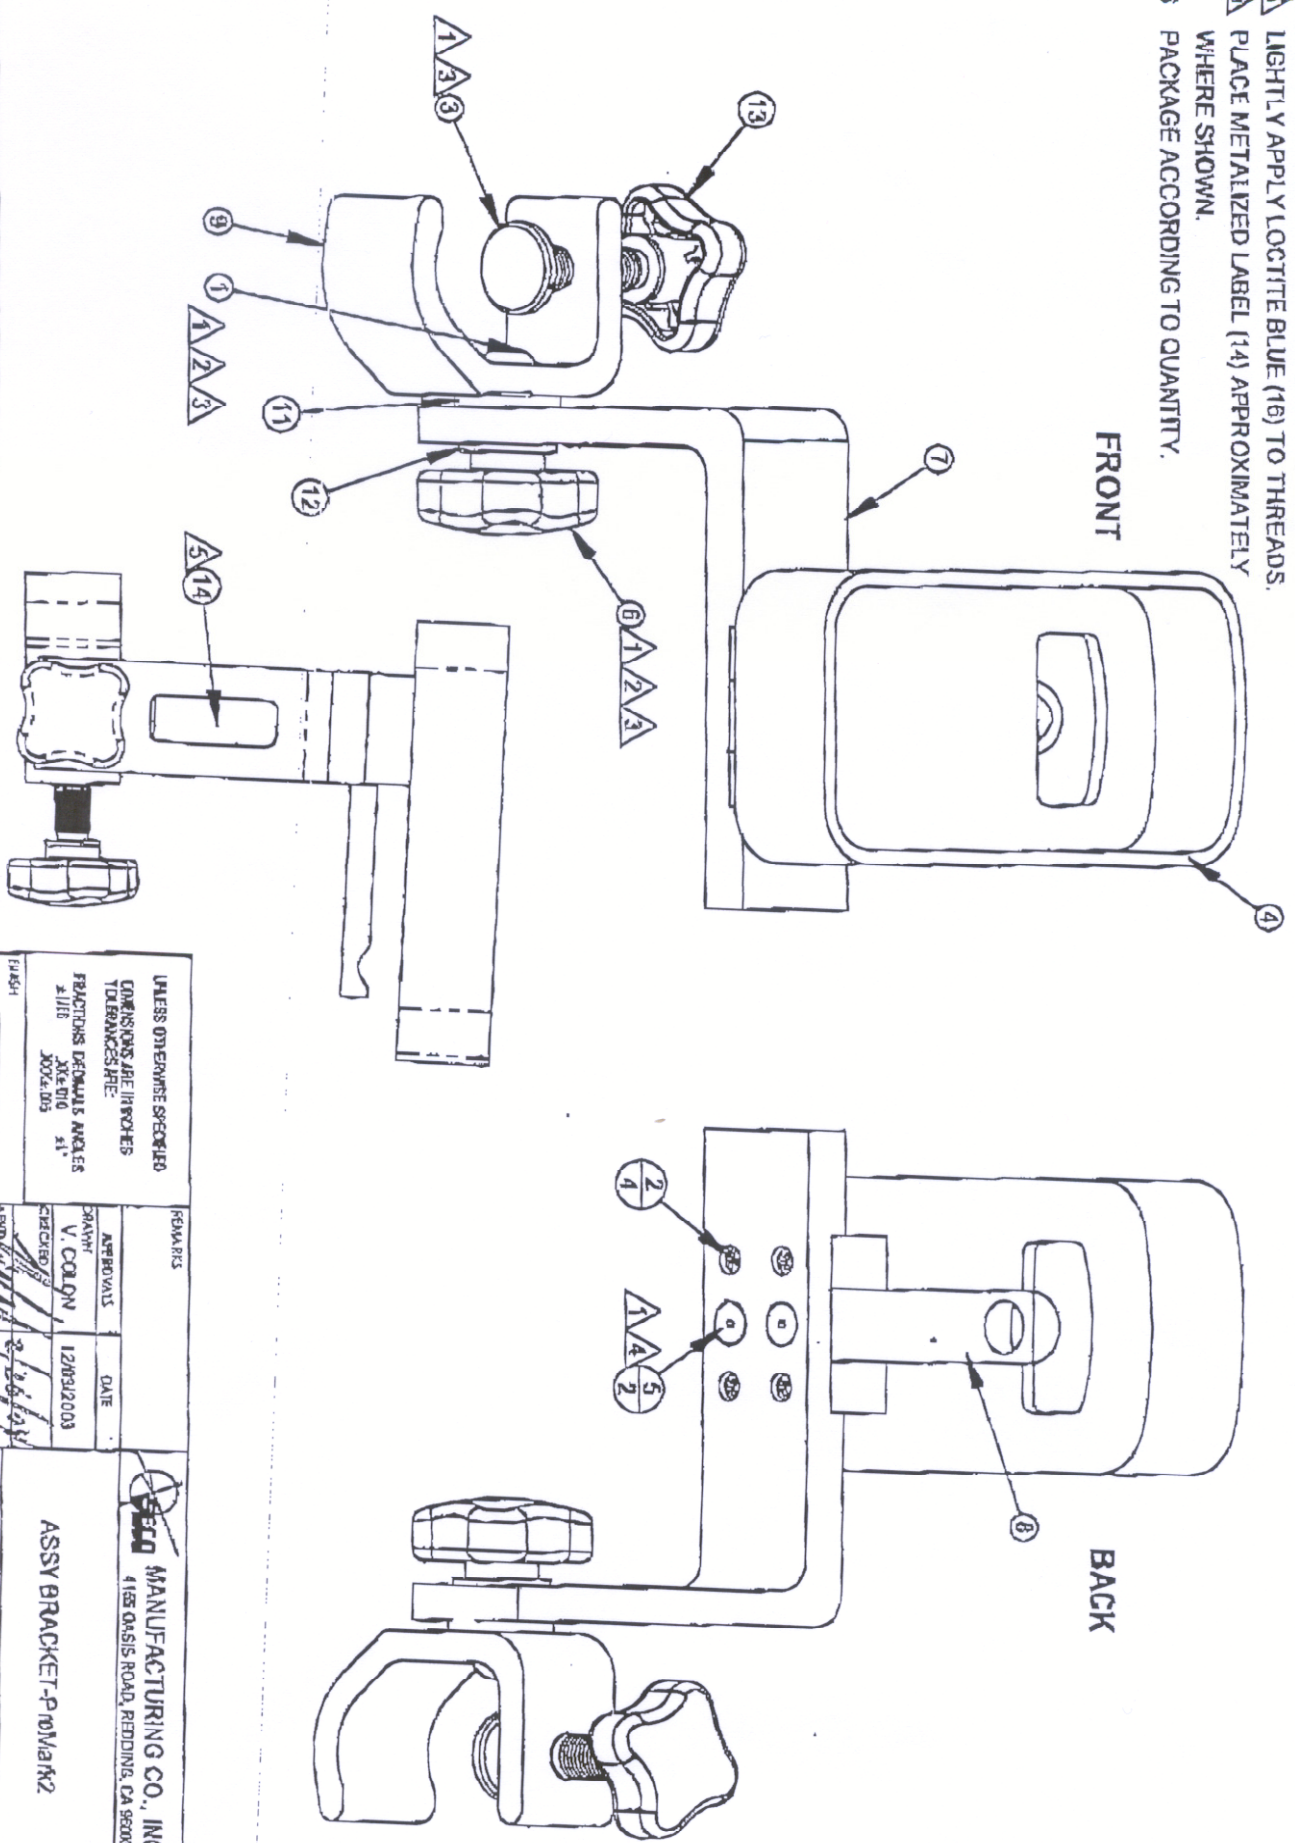

DATE	REV	INITIAL	DWG RELEASE
2532	A		
3544	A2		REVISED SEE EO
	A3		REVISED SEE EO

The information and contents of this drawing are the property of SECO Manufacturing Co., Inc. Unauthorized use without the express written consent of SECO Manufacturing Co., Inc. is prohibited.

WEIGHT: 0.724

ITEM QTY.

DO NOT SCALE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES

±.010 ±.005 ±1°

APPROVALS

DATE

12/03/2003

V. COLON

CHECKED

12/03/2003

REMARKS

MANUFACTURING CO., INC.

4155 OASIS ROAD, REDDING, CA 96003

ASSY BRACKET-P10MAR2

SIZE

DWG NO.

701993

SCALE: NONE

TITLE: A3

SHEET 1 OF 1