

NOTES:


1. ASSEMBLE PER ANSI/IPC-A-610A, CLASS 2 STANDARDS.

4


MARK BOM ASSEMBLY NUMBER, BOM REVISION, VENDOR I.D. AND DATE CODE (DRAWING AND BOM REVISION WON'T ALWAYS MATCH). USE .10±.03 [2.5±0.8] HIGH PERMANENT CONTRASTING LETTERING ON LABEL

RS422	RS232
TxD+	RTS
TxD-	RTS
RxD+	RxD
RxD-	CTS
PPS-	EVENT
GND	GND
12V	12V


Pin4
Pin6
Pin5
Pin3
Pin7
Pin2
Pin1

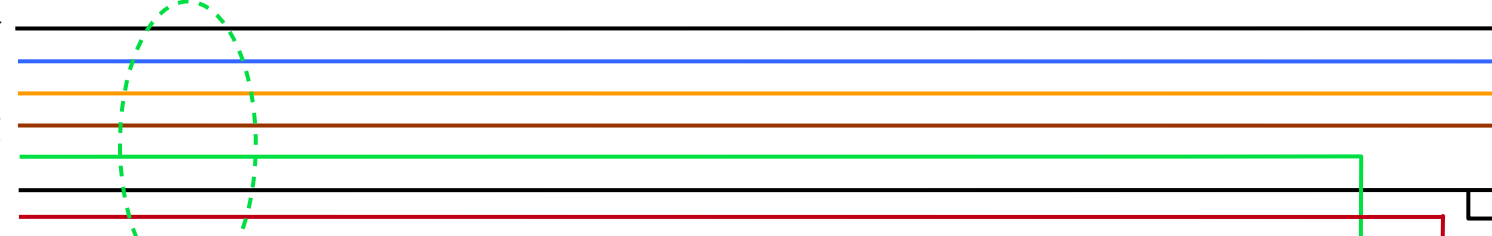

- 1.RTS/TxD +
- 2.TxD/TxD -
- 3.RxD/RxD +
- 4.CTS/RxD
- 5.nu
- 6.GND
- 7.GND
- 8.+12V
- 9.
- 10.
- 11.PPS/EVENT
- 12.
- 13.
- 14.
- 15.
- Shield (Case)



SOLDER CUP SIDE
J1

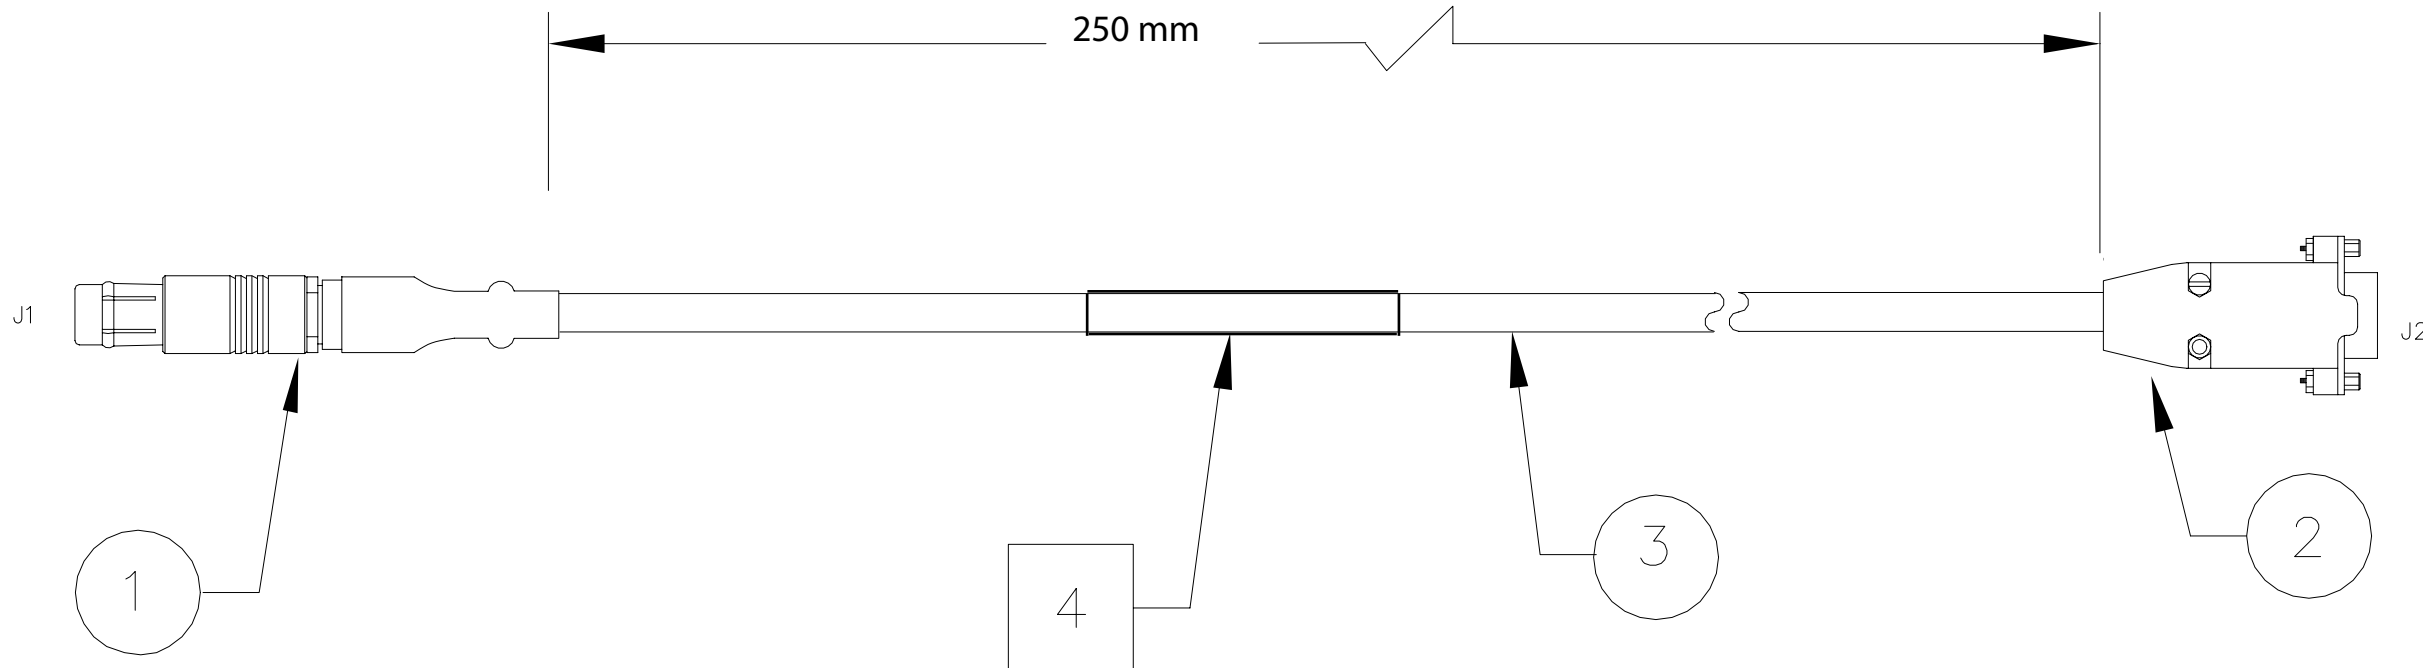

ITEM	DESCRIPTION	MANUFACTURER	QTY
1 J1	S102-A056-130 or 20F1CP07MCC045G	Fisher or Odu	1
2 J2	DB 15 HE501 Femelle + capot et verrou	Amphenol or Fci	1
3	cable blindé R < 50m oHm 12V & GND (Pin 1 - 7)		

This drawing is the exclusive property of Magellan. Reproduction and unauthorized use are forbidden.
Ce document est la propriété inaliénable de Magellan. Reproduction et diffusion sont interdites.

CAD System	System CAO	Pro/Engineer
Drw	:J. CHARNEAU	Date : June 09th 2009
Chkd	: -	Date : -
Appd	:	Date :

Material	Matiere : -	Tolerance : -	Scale : Echelle 1.00
Treatment	Traitement: -	All dimensions shown are in millimeters unless otherwise noted.	
Finish	Finition: -	File	Fichier:

Title	CBL EXT,MULTI-FONCT / FICHER 7CT L 25CM
Titre	

Pages/Sheet

Format

P/N

1/1

A

A702443

Rev / Indice

A