


ERIKSSON PLATFORM (PMK3 – MMCE) CONNECTION

Platform Back Panel

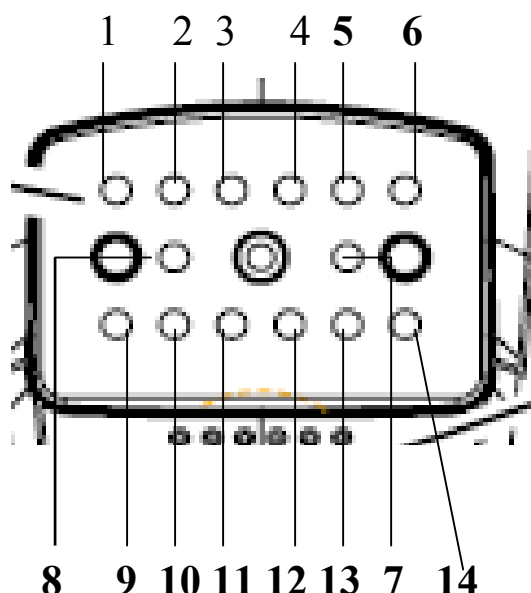

1. **External power “+12v”**
 - from 9 to 16V (compatible with standard 12v car battery)
 - input used by external battery charger
 - absolute maximum voltage 17 to 18Volts (can be destructive)
2. TX0 ☐
3. RX0 ☐ COM 1
4. TX1 ☐
5. RX1 ☐ Not Used
6. USDB+ ☐
7. USDB- ☐ USB device
8. USB host power (+5V)
9. **GND**
10. H+ ☐
11. H- ☐ USB Host
12. **Vbatt ext** ☐
13. **Vbatt ext** ☐ (3,7 V)
3,7V only input exclusively for external battery (no over voltage protection)
14. USB detection

8/10/11 : going to USB A plug through I/O module (for peripherals as USB memory keys)

6/7/14 : going to USB Mini B plug through I/O module (USB bus)