
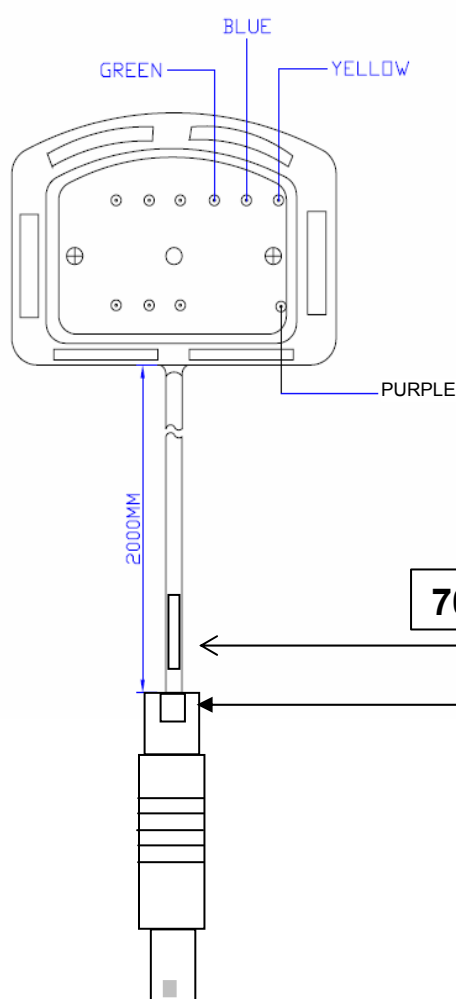


A. CABLE,RS232,PM3
L :2000mm +/-20mm
Diameter : 2.9
RS232 Cable 730523

B. Fiche, FISCHER,7P-102,avec serre câble étanche
Métal push pull, plug S102A056-130+E31102.2/3.1+B FISCHER

C. Identification du cable Code article & Indice de la Bom
Mark assembly number & revision

INDEX INDEX M	ECO ou/or DATE
C	06605



PLUG	A Cable	B Fischer Pins
GND	Purple & Shield	2
+12V	Yellow	1
Rx	Green	6
Tx	Blue	5
		Short between 3 4

702091C

*Mettre du frein filet fort
(type loctite 2701) avant le
montage pour blocage de
l'ensemble*

CE DOCUMENT EST LA PROPRIÉTÉ INALIÉABLE DE THALES NAVIGATION/REPRODUCTION & DIFFUSION INTERDITES
THIS DRAWING IS THE EXCLUSIVE PROPERTY OF THALES NAVIGATION/REPRODUCTION AND UNAUTHORIZED USE ARE FORBIDDEN

THALES NAVIGATION ÉTABLI PAR/DRAWN BY Philippe TESSIER DATE DE CREATION Mai 30,2006 VÉRIFIÉ PAR/CHECKED BY: Gérard JUTON	DÉSIGNATION/TITLE			FOLIO SHEET
	CBL,RS232,MMCE_Z-MAX			
	PLAN N° / DRAWING No.			
	C.D	N°	M	1/1
	A	702091	C	